

This guide provides specifications for Unitronics' Uni-I/O™ modules UIS-04PTN and UIS-04PTKN. Those modules comprise:

- 4 RTD inputs

Uni-I/O modules are compatible with UniStream™ family of Programmable Logic Controllers. They may be either snapped onto the back of a UniStream™ HMI Panel next to a CPU-for-Panel to create an all-in-one HMI + PLC controller, or installed on a standard DIN Rail using a Local Expansion Adapter.

Installation Guides are available in the Unitronics Technical Library at www.unitronics.com

RTD Inputs			
Number of inputs	4		
UIA-04PTN input range ⁽¹⁾	Input Type	Nominal Values	Over/Under-range Values *
	PT100 0.00385 0.00392 0.00391	-200°C ≤ T ≤ 850°C (-328°F ≤ T ≤ 1,562°F)	Under-range: -220°C ≤ T < -200°C (-364°F ≤ T < -328°F) Over-range: 850°C < T ≤ 860°C (1,562°F < T ≤ 1,580°F)
	NI100 0.00618	-100°C ≤ T ≤ 260°C (-148°F ≤ T ≤ 500°F)	Under-range: -150°C ≤ T < -100°C (-238°F ≤ T < -148°F) Over-range: 260°C < T ≤ 270°C (500°F < T ≤ 518°F)
	NI100 0.00617	-60°C ≤ T ≤ 180°C (-76°F ≤ T ≤ 356°F)	Under-range: -104°C ≤ T < -60°C (-155.2°F ≤ T < -76°F) Over-range: 180°C < T ≤ 210°C (356°F < T ≤ 410°F)
	NI120 0.00672	-80°C ≤ T ≤ 260°C (-112°F ≤ T ≤ 500°F)	Under-range: -130°C ≤ T < -80°C (-202°F ≤ T < -112°F) Over-range: 260°C < T ≤ 270°C (500°F < T ≤ 518°F)
	Resistance	0Ω ≤ R ≤ 390Ω	390Ω < R ≤ 395.85Ω
	* Overflow or Underflow ⁽¹⁾ is declared when an input value exceeds the Over-range or Under-range boundaries respectively.		
UIA-04PTKN input range ⁽¹⁾	Input Type	Nominal Values	Over/Under-range Values *
	PT1000 0.00385 0.00392	-200°C ≤ T ≤ 850°C (-328°F ≤ T ≤ 1,562°F)	Under-range: -220°C ≤ T < -200°C (-364°F ≤ T < -328°F) Over-range: 850°C < T ≤ 860°C (1,562°F < T ≤ 1,580°F)

	NI1000 0.00618	-100°C ≤ T ≤ 260°C (-148°F ≤ T ≤ 500°F)	Under-range: -150°C ≤ T < -100°C (-238°F ≤ T < -148°F) Over-range: 260°C < T ≤ 270°C (500°F < T ≤ 518°F)
	NI1000 LG	-50°C ≤ T ≤ 190°C (-58°F ≤ T ≤ 374°F)	Under-range: -60°C ≤ T < -50°C (-76°F ≤ T < -58°F) Over-range: 190°C < T ≤ 200°C (374°F < T ≤ 392°F)
	Resistance	0Ω ≤ R ≤ 3,900Ω	390Ω < R ≤ 3,958.5Ω
	* Overflow or Underflow ⁽¹⁾ is declared when an input value exceeds the Over-range or Under-range boundaries respectively.		
Sensor Type	4, 3 and 2 wire ⁽²⁾		
Absolute maximum rating	±50V at any pin relative to power-supply 0V		
Isolation	None		
Conversion method	Delta-sigma		
Resolution	RTD – 0.1°C (0.1°F) ⁽³⁾ Resistance – 14 bits		
Accuracy 25°C / -20°C to 55°C (77°F / -4°F to 131°F)	UIA-04PTN : RTD – ±0.5°C / ±1.0°C (±0.9°F / ±1.8°F) Resistance – ±0.05% / ±0.1% of full scale UIA-04PTKN : RTD – ±1.0°C / ±1.5°C (±1.8°F / ±2.7°F) Resistance – ±0.1% / ±0.15% of full scale		
Noise rejection	50Hz, 60Hz		
Step response ⁽⁴⁾ (0 to 100% of final value)	Smoothing (filter)	Noise Rejection Frequency	
		60Hz	50Hz
	None	465ms	535ms
	Weak	930ms	1,070ms
	Medium	1,860ms	2,140ms
	Strong	3,720ms	4,280ms
Update time ⁽⁴⁾	Noise Rejection Frequency	Update Time	
	60Hz	465ms	
	50Hz	535ms	
Cable	Shielded, see installation guide for details		
Diagnostics ⁽¹¹⁾ ⁽⁵⁾	Input Overflow or Underflow, sensor connection fault ⁽⁶⁾ ⁽⁷⁾		


IO/COM Bus

Bus current consumption	90mA maximum
-------------------------	--------------


LED Indications			
Input LEDs	Red	On: Input value is in Overflow, Underflow, or a connection fault occurs	
Status LED	A triple color LED. Indications are as follows:		
	Color	LED State	Status
	Green	On	Operating normally
		Slow blink	Boot
		Rapid blink	OS initialization
	Green/Red	Slow blink	Configuration mismatch
	Red	Slow blink	No IO exchange
		Rapid blink	Communication error
Orange	Rapid Blink	OS Upgrade	

Environmental	
Protection	IP20, NEMA1
Operating temperature	-20°C to 55°C (-4°F to 131°F)
Storage temperature	-30°C to 70°C (-22°F to 158°F)
Relative Humidity (RH)	5% to 95% (non-condensing)
Operating altitude	2,000 m (6,562 ft)
Shock	IEC 60068-2-27, 15G, 11ms duration
Vibration	IEC 60068-2-6, 5Hz to 8.4Hz, 3.5mm constant amplitude, 8.4Hz to 150Hz, 1G acceleration

Dimensions	
Weight	100 g (0.220 lb)
Size	Refer to the images below

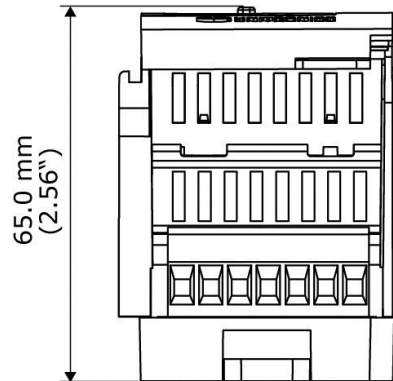

Bottom View

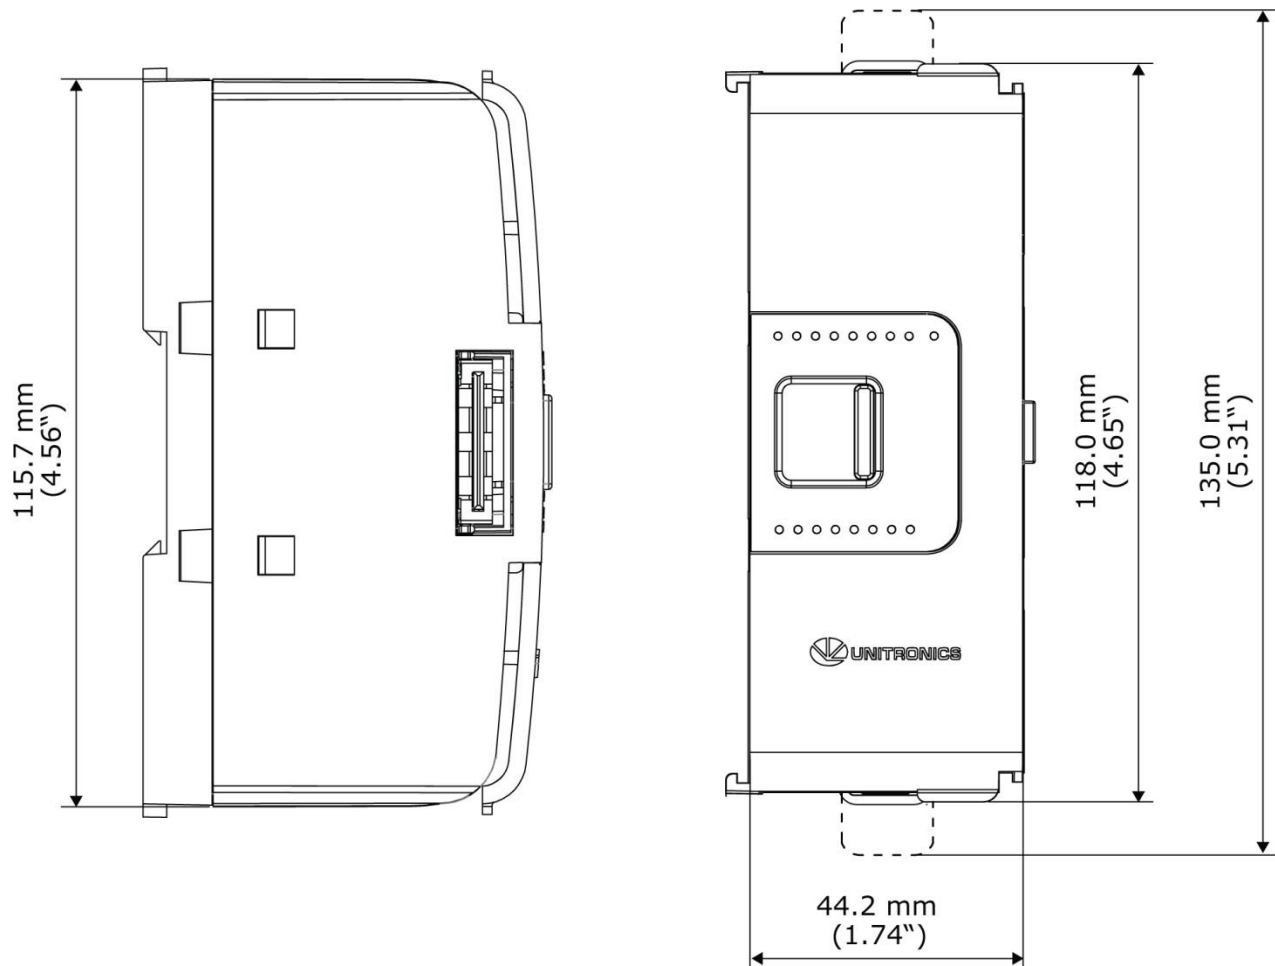

Side View

Front View

Notes:

1. The UIS-04PTN and UIS-04PTKN measures values that are slightly higher or lower than the nominal input range (i.e. Input Over/Under-range respectively).
Note that when input Overflow, Underflow or a connection fault occurs, it is indicated in the corresponding I/O Status tag (refer to the UniLogic help for details) as well as by the respective input LED (see LED Indications), while the input value is registered as follows:

Fault Type	Registered Value in the Input Tag
Overflow	32,767
Underflow	-32,767
Connection fault	-32,768

2. The UIS-04PTN and UIS-04PTKN inherently supports 3-wire sensors.
4-wire sensors may be connected by utilizing 3 of the sensor wires; in-order to achieve the specified performance, all sensor wires shall be of identical type and length just as with a 3-wire sensor connection.
2-wire sensors may also be connected; performance in this case will degrade because of the wires' resistance.
Refer to the UIS-04PTN and UIS-04PTKN installation guide for detailed installation instructions.
3. For temperature measurement, the value is represented in 0.1° units. For example, a temperature of 12.3° is represented as 123 at the Value tag.
4. Step response and update time are independent of the number of inputs that are used.
5. See LED Indications Table above for description of the relevant indications. Note that the diagnostics results are also indicated in the I/O tags and can be observed through the UniApps™ or the online state of the UniLogic™.
6. Sensor connection fault check is active by default for both temperature and resistance measurements.
7. Sensor connection fault check may interfere with some test equipment like resistance/RTD simulators and thus may induce reading errors or cause malfunction of the test equipment and/or the UIS-04PTN and UIS-04PTKN.
In order to interoperate correctly with such equipment, you may set the Disable Fault Detection I/O tag. This will disable connection fault check for all inputs.
Note that when this tag is set, the UIS-04PTN and UIS-04PTKN will not check, or report, connection faults; thus, the reading in such case is unpredictable.

The information in this document reflects products at the date of printing. Unitronics reserves the right, subject to all applicable laws, at any time, at its sole discretion, and without notice, to discontinue or change the features, designs, materials and other specifications of its products, and to either permanently or temporarily withdraw any of the forgoing from the market.

All information in this document is provided "as is" without warranty of any kind, either expressed or implied, including but not limited to any implied warranties of merchantability, fitness for a particular purpose, or non-infringement. Unitronics assumes no responsibility for errors or omissions in the information presented in this document. In no event shall Unitronics be liable for any special, incidental, indirect or consequential damages of any kind, or any damages whatsoever arising out of or in connection with the use or performance of this information.

The tradenames, trademarks, logos and service marks presented in this document, including their design, are the property of Unitronics (1989) (R"G) Ltd. or other third parties and you are not permitted to use them without the prior written consent of Unitronics or such third party as may own them.

03/16