
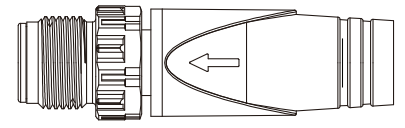
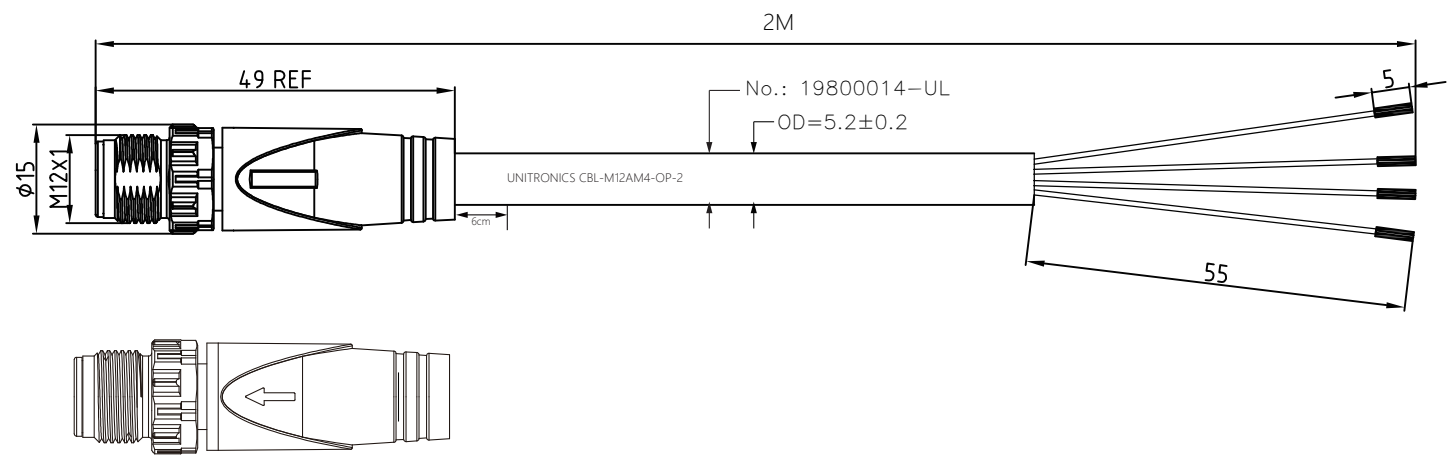


TECHNIACAL SPECIFICATIONS	
CONTANCT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC DIE-CAST/NICKEL
RATED CURRENT	4A
RATED VOLTAGE	250V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS(AWG)	4×22AWG
OPERATING TEMPERATURE	-25°C~ + 85°C
PROTECTION CLASS	IEC IP67,IN MATED CONDITION
XXXXXX	XXXXXX

REV	CHG.	DATE	DESCRIPTION	REVISION

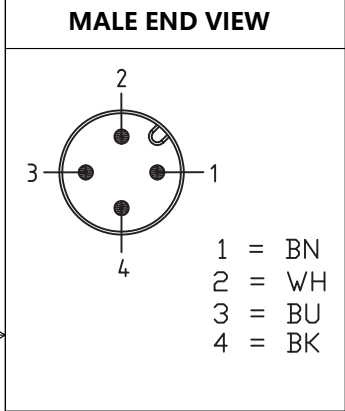

SOURCE DRAWING-FOR REFERENCE ONLY

APPROVED BY		DATE	
CHECKED BY	ALEX	DATE	
DRAWING BY		DATE	2023.8.9



CABLE LENGTH	TOLERANCE	
	ALL LENGTHS	+4%(OR 50mm) OF LENGTH
STRIP LENGTH	TOLERANCE	
0-7mm	±1.0mm	
8-29mm	±1.5mm	
30-49mm	±2.0mm	
50-99mm	±3.0mm	
70-100mm	±4.0mm	
over 100mm	±5.0mm	

UNITS mm

1st Angle Projection

DESCRIPTION: CBL-M12AM4-OP-2			
PART NO.			
REV	A	SHEET	1 OF 1