

TECHNIACAL SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	ZINC DIE-CAST/NICKEL
RATED CURRENT	16A
RATED VOLTAGE	63VDC
OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS(AWG)	5×14AWG
OPERATING TEMPERATURE	-25°C~ + 85°C
PROTECTION CLASS	IEC IP67,IN MATED CONDITION
XXXXXX	XXXXXX


REV	CHG.	DATE	DESCRIPTION	REVISION

FEMALE END VIEW

1.BN
2.WH
3.BU
4.BK
5.GY

MALE END VIEW

1.BN
2.WH
3.BU
4.BK
5.GY

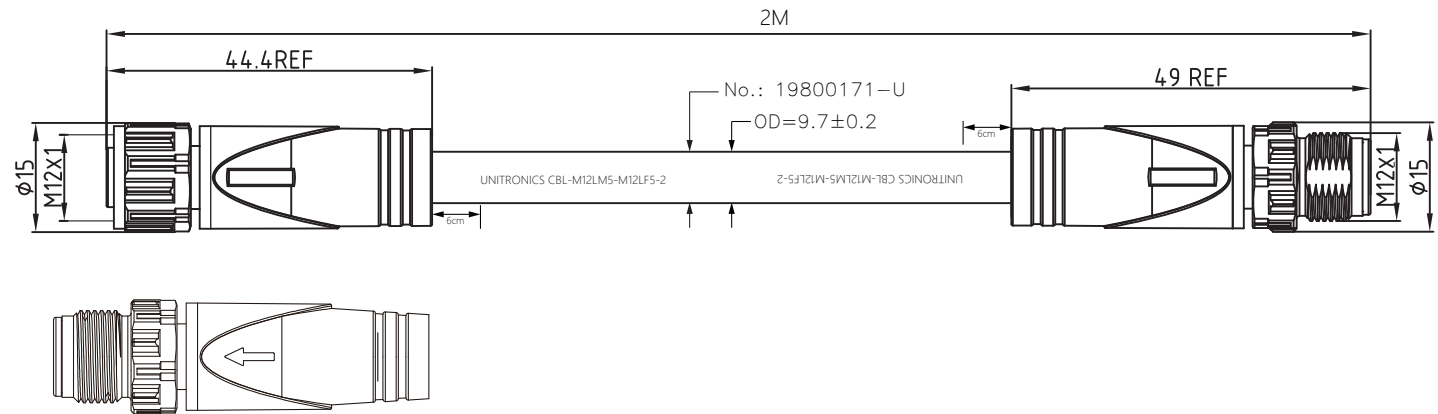

SOURCE DRAWING-FOR REFERENCE ONLY

APPROVED BY		DATE	
CHECKED BY	ALEX	DATE	
DRAWING BY		DATE	2023.8.9
TOLERANCE UNLESS OTHERWISE SPECIFIED	CABLE LENGTH	TOLERANCE	
	ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0%(OR 0mm) OF LENGTH WHICHEVER IS GREATER	
	STRIP LENGTH	TOLERANCE	
	0-7mm	+1.0mm	
	8-29mm	+1.5mm	
	30-49mm	+2.0mm	
50-99mm	+3.0mm		
70-100mm	+4.0mm		
over 100mm	+5.0mm		

UNITRONICS®

UNITS: mm

1st Angle Projection

DESCRIPTION: CBL-M12LMS-M12LF5-2

PART NO.

REV	A	SHEET	1 OF 1
-----	---	-------	--------