


MAC

MAC address range:
Start: 00:0D:22:52:00:00
End: 00:0D:22:53:FF:FF

REV	CHG.	DATE	DESCRIPTION	REVISION
-----	------	------	-------------	----------




Operating Voltage : 24(18...30) DC
Sensor Supply : 24(18...30)V DC
Output Current : <2.0A/channel
Max. Total Current : 12A
(Gen.,PD)




UL LISTED
Ind. Cont. Eq
E214119

LEFT

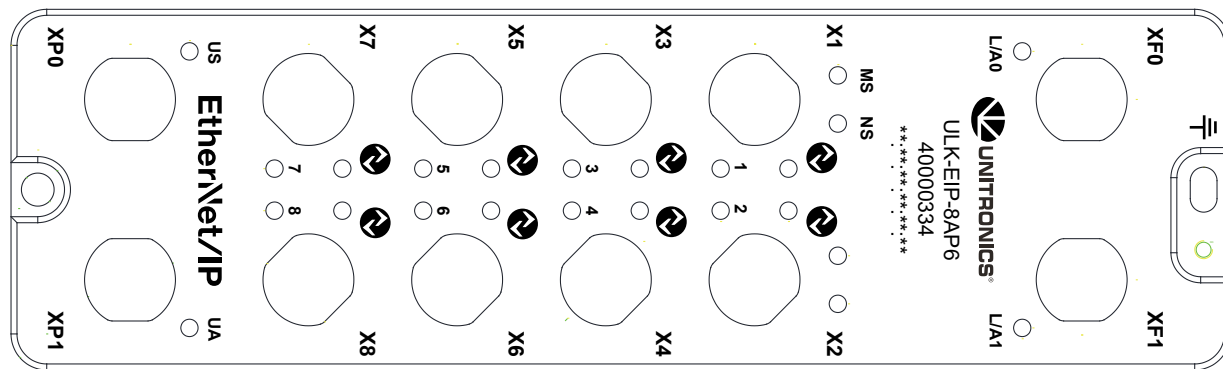

RIGHT

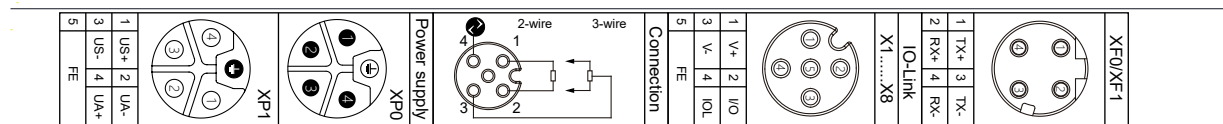

Protecting Cap
M12x6

SOURCE DRAWING-FOR REFERENCE ONLY


APPROVED BY		DATE	
CHECKED BY		DATE	
DRAWING BY	Michael Lee	DATE	2023.11.20
TOLERANCE UNLESS OTHERWISE SPECIFIED	CABLE LENGTH	TOLERANCE	
	ALL LENGTHS	+4%(OR 50mm) OF LENGTH -0%(OR 0mm) OF LENGTH WHICHEVER IS GREATER	
	STRIP LENGTH	TOLERANCE	
	0-7mm	±1.0mm	
	8-29mm	±1.5mm	
	30-49mm	±2.0mm	
	50-99mm	±3.0mm	
70-100mm	±4.0mm		
over 100mm	±5.0mm		



UNITS mm

DESCRIPTION:

1st Angle Projection



ULK-EIP-8AP6

PART NO.

REV	A	SHEET	1 OF 1
-----	---	-------	--------